


Double Wall Tanks

Protection against Hazardous Chemical Spills

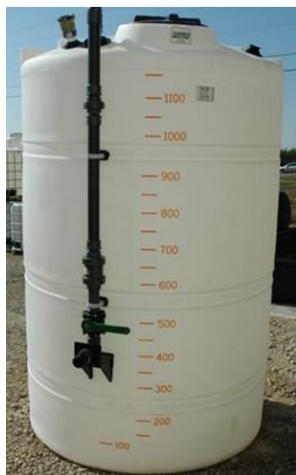

- Above Ground Tanks
- Rated for storage of liquids
- Rated for atmospheric pressure
- HDPE tank is approved for potable water.
- Tank capacity from 120 – 10,000 gallons
- Molded from FDA Polyethylene (HDPE)
- Complies with FDA standards
- Approved High Density 21 CFR 177.1520(1)3.1 and 3.2
- Max continuous use temp of 130° F.
- Meets ASTM D 1998-06 Wall Thickness Standard Specification for Polyethylene Upright Storage Tanks.

Model #	Capacity (Gallon)	Specific Gravity	Diameter	Height
GTI-DWT-10000-1.9	10,000	1.9 SG	141"	202"
GTI-DWT-10000-1.5	10,000	1.5 SG	141"	202"
GTI-DWT-8400-1.9	8,400	1.9 SG	141"	197"
GTI-DWT-8400-1.5	8,400	1.5 SG	141"	185"
GTI-DWT-6500-1.9	6,500	1.9 SG	120"	196"
GTI-DWT-6500-1.5	6,500	1.5 SG	120"	196"
GTI-DWT-6000-1.9	6,000	1.9 SG	120"	182"
GTI-DWT-6000-1.5	6,000	1.5 SG	120"	182"
GTI-DWT-5000-2.2	5,000	2.2 SG	102"	178"
GTI-DWT-5000-1.9	5,000	1.9 SG	102"	178"
GTI-DWT-5000-1.5	5,000	1.5 SG	102"	178"
GTI-DWT-4000-2.2	4,000	2.2 SG	120"	127"
GTI-DWT-4000-1.9	4,000	1.9 SG	120"	127"
GTI-DWT-4000-1.5	4,000	1.5 SG	120"	127"
GTI-DWT-3450-1.9	3,450	1.9 SG	102"	120"
GTI-DWT-3450-1.5	3,450	1.5 SG	102"	120"
GTI-DWT-3000-2.2	3,000	2.2 SG	102"	117"
GTI-DWT-3000-1.9	3,000	1.9 SG	102"	117"
GTI-DWT-3000-1.5	3,000	1.5 SG	102"	131"
GTI-DWT-1550-1.9	1,550	1.9 SG	88"	125"
GTI-DWT-1250-1.9	1,250	1.9 SG	87"	115"
GTI-DWT-1050-1.9	1,050	1.9 SG	60"	149"
GTI-DWT-1000-1.9	1,000	1.9 SG	64"	89"
GTI-DWT-1000-1.5	1,000	1.5 SG	64"	89"
GTI-DWT-800-1.9	800	1.9 SG	64"	75"
GTI-DWT-700-1.9	700	1.9 SG	60"	98"
GTI-DWT-550-1.9	550	1.9 SG	48"	84"
GTI-DWT-500-1.9	500	1.9 SG	60"	84"
GTI-DWT-300-1.9	300	1.9 SG	48"	79"
GTI-DWT-265-1.9	265	1.9 SG	35"	91"
GTI-DWT-250-1.9	250	1.9 SG	35"	86"
GTI-DWT-160-1.9	160	1.9 SG	31"	69"
GTI-DWT-130-1.9	130	1.9 SG	35"	46"
GTI-DWT-120-1.9	120	1.9 SG	32"	54"

